


Ball screw and nut seat

High precision grinding screw series (TYPE) FDI-20-5T3

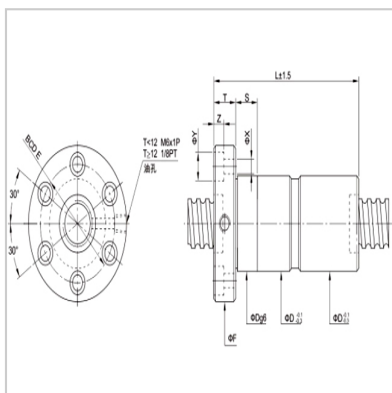

Bearing number : 20-5T3

Specification :

Outside diameter :	20
Lead the way :	5
Bead diameter :	3.175
Node diameter :	20.6
Root diameter :	17.334
Number of bead rolls :	3
Rigid K (kgf/ μ m) :	39
Dynamic Load C (kgf) :	851
Static load ratings Co (kgf) :	1766

Nut cap :

D :	32
D :	34
L :	78

Flange :

F :	57
T :	12
BCD-E :	45

Flange hole :

X :	5.5
Y :	9.5
Z :	5.5

Contact surface length :

S :	24
-----	----

: