


Ball screw and nut seat

High precision grinding screw series (TYPE) FDI-25-5T3

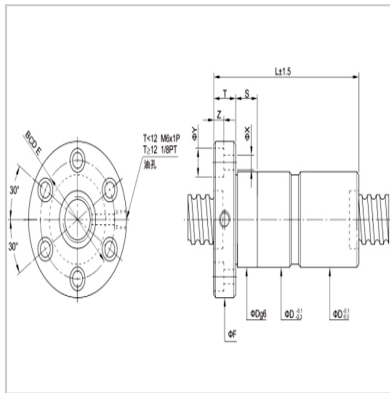

Bearing number : 25-5T3

Specification :

Outside diameter :	25
Lead the way :	5
Bead diameter :	3.175
Node diameter :	25.6
Root diameter :	22.334
Number of bead rolls :	3
Rigid K (kgf/μm) :	55
Dynamic Load C (kgf) :	976
Static load ratings Co (kgf) :	2313

Nut cap :

D :	37
D :	40
L :	78

Flange :

F :	64
T :	12
BCD-E :	52

Flange hole :

X :	5.5
Y :	9.5
Z :	5.5

Contact surface length :

S : 24